
COBIANWD

COVENT IMPERIAL

Tilt & Turn Window

THERMAL BREAK ALUMINUM SYSTEM | PRODUCT TECHNICAL INFORMATION

COVENT IMPERIAL Thermal Break

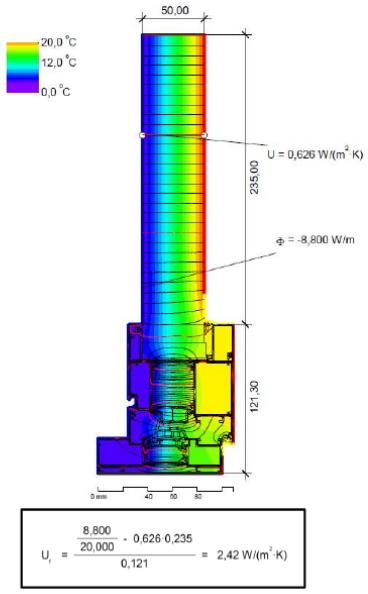



EFICIENCIA ENERGETICA
Uw desde 0.9 (W/m2K)
Consultar tipología, dimensiones y vidrio.

ACRISTALAMIENTO
Máximo acristalamiento: 55 mm = 2 5/8 in
Máximo aislamiento acústico: Rw= 43 dBA

CATEGORIAS ALCANZADAS EN BANCOS DE ENSAYO
Permeabilidad al aire
(UNE-EN 1026:2000): Clase 4

Estanqueidad al agua
(UNI-EN 1027:2000): Clase E2100

Resistencia al viento
(UNE-EN 12211:2000): Clase C5


SECCIONES
Marco: 101.6 mm = 4"
Hoja: 85 mm = 3.34"

ESPERSOR PERFILERIA
Ventana: 1.5 mm = 0.05"
Puerta: 1.7 mm = 0.06"


LONGITUD VARILLA POLIANIDA
34 mm = 1.33"

DIMENSIONES Y PESOS MAXIMOS

TIPO APERTURA	L MAX.	H MAX.	PESO MAX. (KG)
OSCILOBATIENTE 1 Hoja / 2 Hojas	1300 mm 51.18"	2300 mm 90.55"	120 kg 264 lb
ABATIBLE INTERIOR 1 Hoja / 2 Hojas	1100 mm 43.30"	2300 mm 90.55"	75 kg (2 Bisagras de dos Palas) 90 kg (3 Bisagras de tres Palas)

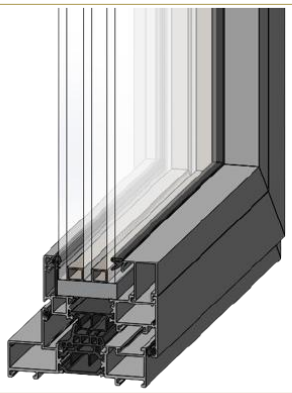

POSIBILIDADES DE APERTURA

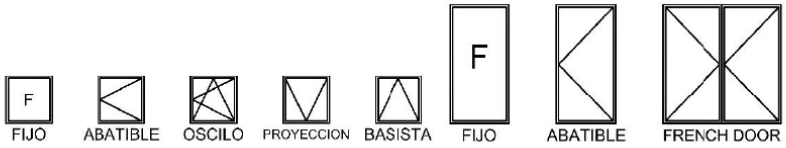

IMPERIAL THERMAL BREAK SYSTEM

- 34 mm polyamide thermal barrier separates interior and exterior aluminum sections.
- Window frame depth: 4 in [101.6 mm] | Window sash depth: 3.34 in [85 mm].
- Maximum published glazing capacity: 55 mm | Published acoustic performance up to Rw 43 dB.

COBIAN CONFIGURATION

Tilt & Turn Window | Commercial range: 18-36 in W x 18-72 in H

Technical basis: COVENT Imperial Thermal Break Technical Catalog 2025.

COBIANWD


COVENT IMPERIAL

Tilt & Turn Window


SELECTED PRIMARY PROFILES | ENGLISH IDENTIFICATION

COVENT IMPERIAL Thermal Break

TB-34001 WINDOW FRAME / TB-340



TB-34001
Cerco fijo Ventana



TB-34002
Hoja Ventana Apertura Interior

Profile geometry and dimensions reproduced directly from the COVENT technical catalog; Spanish profile descriptions are identified above in English. Secondary beads, gaskets and accessory profiles are omitted.

COBIANWD


COVENT IMPERIAL

Tilt & Turn Window

TILT & TURN WINDOW ASSEMBLY

COVENT IMPERIAL Thermal Break

Desglose de Ventana Oscilobatiente

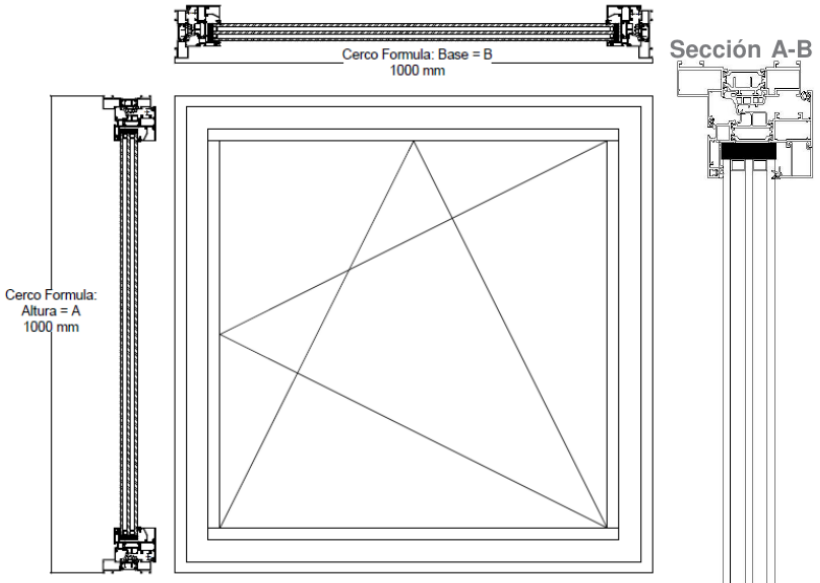

	Cantidad	Clave	Descripción
Accesorios	4	AVE-0455DX	ESCUADRA CERCO GRANDE VENTANA
	8	AVE-4164DX	ESCUADRA CERCO Y HOJA VENTANA
	4	AVE-A7101	ESCUADRA HOJA PEQUEÑA VENTANA
	1	AVE-H1233R3	BISAGRA OCULTA (KIT)
	1	AVE-507063	TRANSMISIÓN MONODIRECCIONAL 7 MM
	1	AVE-7008NE	MANILLA DELTA NEGRO
	2	AVE-059233	PLETINA FALLEBA
	8	AVE-5008-P	CALZO PARA VIDRIO GRIS 8 MM
	4	AVE-A09020	DREN
	2A+2B	AVE-865022-001	JUNTA DE ACRISTALAR NO 68
	2A+2B	AVE-E101562P	GOMA CENTRAL
	2A+2B	AVE-EC100075	GOMA RESPALDO Y BATIENTE EXTERIOR
	2A+2B	AVE-EC100183	GOMA BATIENTE
	2A+2B	AVE-EC100315	GOMA RESPALDO DE ACRISTALAR CON BARBA

SOURCE DRAWING

Original tilt & turn assembly and Section A-B; source drawing retained for technical reference.

COBIANWD

COVENT IMPERIAL

Tilt & Turn Window

PUBLISHED TECHNICAL PERFORMANCE

THERMAL BREAK

34 mm [1.33 in] polyamide barrier

GLAZING

Maximum published glazing: 55 mm

ENERGY

Uw from 0.9 W/m²K - manufacturer states configuration, dimensions and glass must be considered

ACOUSTIC

Maximum published acoustic insulation: Rw 43 dB

AIR

UNE-EN 1026:2000 - Class 4

WATER

UNI-EN 1027:2000 - Class E2100

WIND

UNE-EN 12211:2000 - Class C5

PUBLISHED TILT & TURN TEST CONFIGURATION

Window 1230 x 1480 mm: Air Class 4 | Water E2100 | Wind C5 | Acoustic 43 (-2,-5) | Uf 1.5 W/m²K.

Published classifications apply to the source/test configuration shown by COVENT and do not replace project-specific verification for final size, glass, reinforcement and hardware.